

PST ZP680

RECTIFIER DIODE

Features

- Blocking Capability up to 6000 V
- High Surge Rating
- Rugged Ceramic Hermetic Package

ELECTRICAL CHARACTERISTICS AND RATINGS

Blocking

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Repetitive peak reverse voltage	V_{RRM}		6000		V	$T_j = -40\text{ °C to }150\text{ °C}$
Non repetitive peak reverse voltage	V_{RSM}		6100		V	$T_j = -40\text{ °C to }150\text{ °C}$
Repetitive peak reverse current	I_{RRM}		100		mA	$T_j = T_{jmax}$, $V = V_{RRM}$

Conducting




Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Average value of forward current	$I_{F(AV)}$		1380		A	50 Hz sinewave, 180° conduction, $T_c = 85\text{ °C}$
RMS value of forward current	$I_{F(RMS)}$		2167		A	50 Hz sinewave, 180° conduction, $T_c = 85\text{ °C}$
Peak one cycle surge (non repetitive) current	I_{FSM}		20		kA	50 Hz sinewave, 180° conduction, $T_j = T_{jmax}$, $V_R = 0$
I square t	$I^2 t$		2000		kA^2s	$T_j = T_{jmax}$
Peak forward voltage	V_{FM}		1.99		V	Forward current 2500 A, $T_j = T_{jmax}$
Threshold voltage	$V_{F(TO)}$		1.00		V	$T_j = T_{jmax}$
Forward slope resistance	r_F		0.396		mΩ	$T_j = T_{jmax}$

Thermal and mechanical characteristics and ratings


Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Operating temperature	T_j	-40	150		°C	
Storage temperature	T_{stg}	-40	150		°C	
Thermal resistance junction to case	$R_{th(j-c)}$		0.020		°C/W	Double side cooled, 180° SIN
Thermal resistance case to sink	$R_{th(c-s)}$		0.005		°C/W	Mounting surfaces smooth, flat and greased
Mounting force	F	22	25		kN	
Weight	W			520	g	

PST ZP680

RECTIFIER DIODE

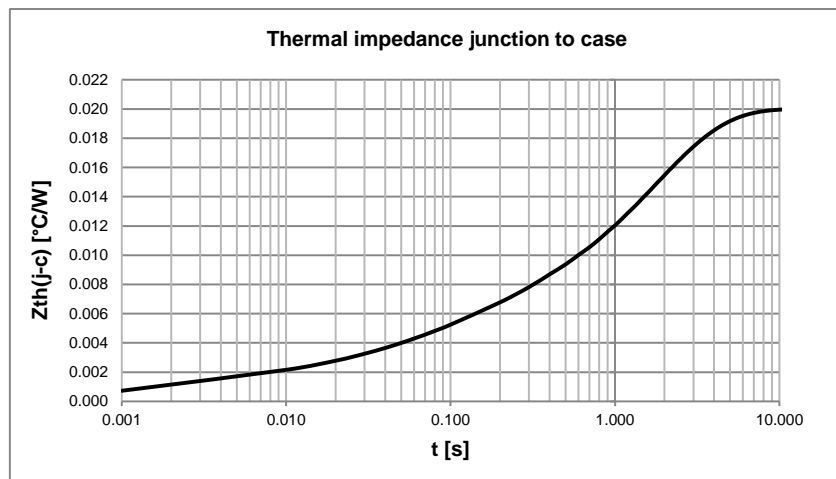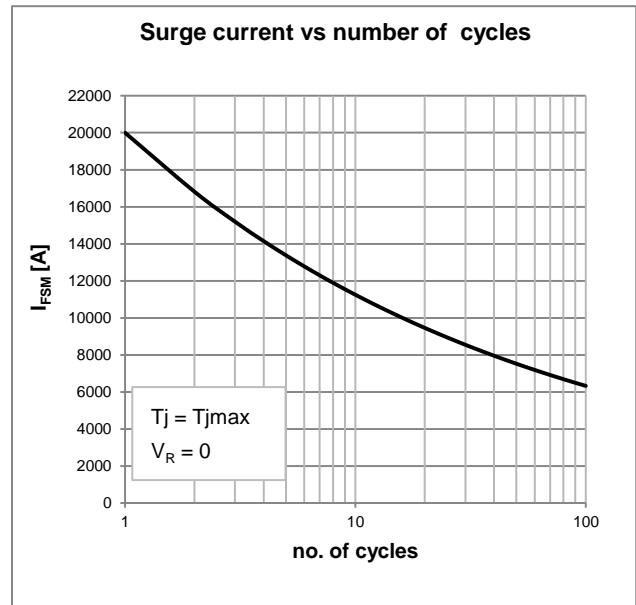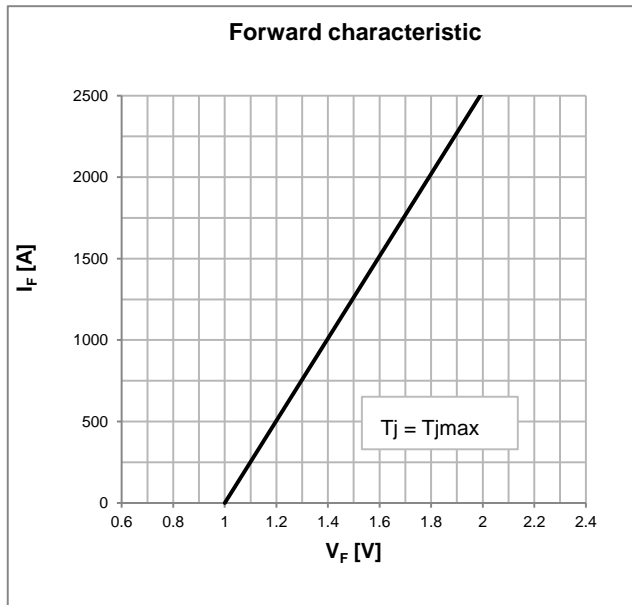

OUTLINE AND DIMENSIONS

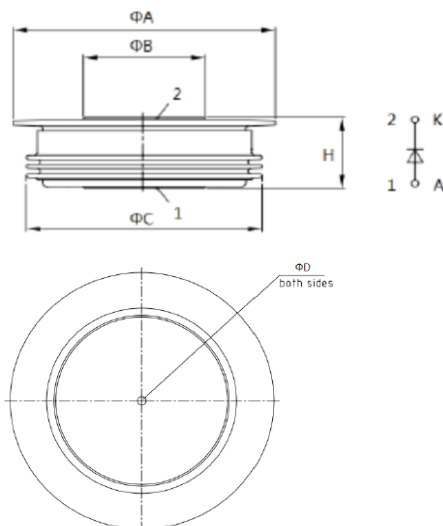

	A	B	C	D	H
mm	77	48	70	3.5 x 3	27 ± 1

- All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink surfaces with flatness < 0.03 mm and roughness < 2μm