

PST KK1047

HIGH POWER FAST SWITCHING THYRISTOR FOR INVERTER AND CHOPPER APPLICATIONS

Features :

- Blocking Capability up to 1400 V
- High dV/dt Capability
- All Diffused Structure
- Amplifying Gate Configuration
- Rugged Ceramic Hermetic Package

ELECTRICAL CHARACTERISTICS AND RATINGS

Blocking

| Parameter | Symbol | Min | Max | Typ | Unit | Conditions |
|-------------------------------------|-----------|-----|------|-----|------|--|
| Repetitive peak reverse voltage | V_{RRM} | | 1400 | | V | $T_j = -40\text{ °C to }125\text{ °C}$ |
| Repetitive peak off-state voltage | V_{DRM} | | 1400 | | V | $T_j = -40\text{ °C to }125\text{ °C}$ |
| Non repetitive peak reverse voltage | V_{RSM} | | 1500 | | V | $T_j = -40\text{ °C to }125\text{ °C}$ |
| Repetitive peak reverse current | I_{RRM} | | 100 | | mA | $T_j = T_{jmax}, V = V_{RRM}$ |
| Repetitive peak off-state current | I_{DRM} | | 100 | | mA | $T_j = T_{jmax}, V = V_{DRM}$ |

Conducting

| Parameter | Symbol | Min | Max | Typ | Unit | Conditions |
|-----------------------------------|--------------|-----|------|-----|-----------|--|
| Average value of on-state current | $I_{T(AV)}$ | | 1050 | | A | 50 Hz sine wave, 180° conduction, $T_c = 85\text{ °C}$ |
| RMS value of on-state current | $I_{T(RMS)}$ | | 1649 | | A | 50 Hz sine wave, 180° conduction, $T_c = 85\text{ °C}$ |
| Surge non repetitive current | I_{TSM} | | 16 | | kA | 50 Hz sine wave Half cycle |
| I square t | $I^2 t$ | | 1280 | | kA^2s | $V_R = 0$ $T_j = T_{jmax}$ |
| Peak on-state voltage | V_{TM} | | 1.8 | | V | On-state current 2000 A, $T_j = T_{jmax}$ |
| Threshold voltage | $V_{T(TO)}$ | | 1.30 | | V | $T_j = T_{jmax}$ |
| On-state slope resistance | r_T | | 0.23 | | $m\Omega$ | $T_j = T_{jmax}$ |
| Holding current | I_H | | | 200 | mA | $V_D = 12\text{ V}; I_T = 2.5\text{ A}$ |
| Latching current | I_L | | | 400 | mA | $V_D = 12\text{ V}; R_L = 12\ \Omega$ |

PST KK1047

HIGH POWER FAST SWITCHING THYRISTOR

Triggering

| Parameter | Symbol | Min | Max | Typ | Unit | Conditions |
|--------------------------------|-------------|-----|-----|-----|------|---|
| Gate current | I_{GT} | | 300 | | mA | $V_D = 6\text{ V}, R_L = 3\ \Omega, T_j = -40\ ^\circ\text{C}$ |
| | | | 150 | | mA | $V_D = 6\text{ V}, R_L = 3\ \Omega, T_j = 25\ ^\circ\text{C}$ |
| | | | 125 | | mA | $V_D = 6\text{ V}, R_L = 3\ \Omega, T_j = 125\ ^\circ\text{C}$ |
| Gate voltage | V_{GT} | | 5 | | V | $V_D = 6\text{ V}, R_L = 3\ \Omega, T_j = -40\ ^\circ\text{C}$ |
| | | | 3 | | V | $V_D = 6\text{ V}, R_L = 3\ \Omega, T_j = 0 \div 125\ ^\circ\text{C}$ |
| | | 0.3 | | | V | $V_D = V_{DRM}, R_L = 1\ \text{k}\Omega, T_j = 125\ ^\circ\text{C}$ |
| Peak gate current | I_{GM} | | 10 | | A | |
| Peak reverse gate voltage | V_{RGM} | | 5 | | V | |
| Peak gate power dissipation | P_{GM} | | 200 | | W | |
| Average gate power dissipation | $P_{G(AV)}$ | | 5 | | W | |

Switching

| Parameter | Symbol | Min | Max | Typ | Unit | Conditions |
|--|----------|-----|-----|-----|------------------|---|
| Critical rate of rise of on-state current - non repetitive | di/dt | | 800 | | A/ μs | $I_G = 5 \cdot I_{GT}, t_r = 1\ \mu\text{s}, V_{DRM} \leq 1000\text{V}, T_j = T_{jmax}$ |
| Critical rate of rise of on-state voltage | dv/dt | | 500 | | V/ μs | Linear ramp up to 80% of V_{DRM} |
| Gate controlled delay time | t_d | | 1.5 | 0.7 | μs | $I_{TM} = 50\text{ A}, V_D = V_{DRM}, V_G = 20\text{ V}$ $R_G = 20\ \Omega, t_r = 0.1\ \mu\text{s}, t_p = 20\ \mu\text{s}$ |
| Turn-off time | t_q | 25 | | | μs | $I_{TM} = 1000\text{ A}; di/dt = 60\text{ A}/\mu\text{s}; V_R \geq 50\text{ V}$ $dV/dt = 200\text{ V}/\mu\text{s}$ linear to 80% V_{DRM} $V_G = 0\text{ V}; T_j = T_{jmax}$ |
| Reverse recovery charge | Q_{rr} | | * | 400 | μC | $I_T = 1000\text{ A}$ $di/dt = 100\text{ A}/\mu\text{s}$ |
| Reverse recovery current | I_{rr} | | * | 200 | A | $V_R \geq 50\text{ V}$ $T_j = T_{jmax}$ |




* for guaranteed max value, please contact Factory

Thermal and mechanical


| Parameter | Symbol | Min | Max | Typ | Unit | Conditions |
|-------------------------------------|---------------|-----|-------|-----|---------------------------|--|
| Operating temperature | T_j | -40 | 125 | | $^\circ\text{C}$ | |
| Storage temperature | T_{stg} | -40 | 150 | | $^\circ\text{C}$ | |
| Thermal resistance junction to case | $R_{th(j-c)}$ | | 0.020 | | $^\circ\text{C}/\text{W}$ | Double side cooled , 180° SIN |
| Thermal resistance case to sink | $R_{th(c-s)}$ | | 0.006 | | $^\circ\text{C}/\text{W}$ | Double side cooled, mounting surfaces smooth, flat and greased |
| Mounting force | F | 20 | 22 | | kN | |
| Weight | W | | | 480 | g | |

PST KK1047

HIGH POWER FAST SWITCHING THYRISTOR

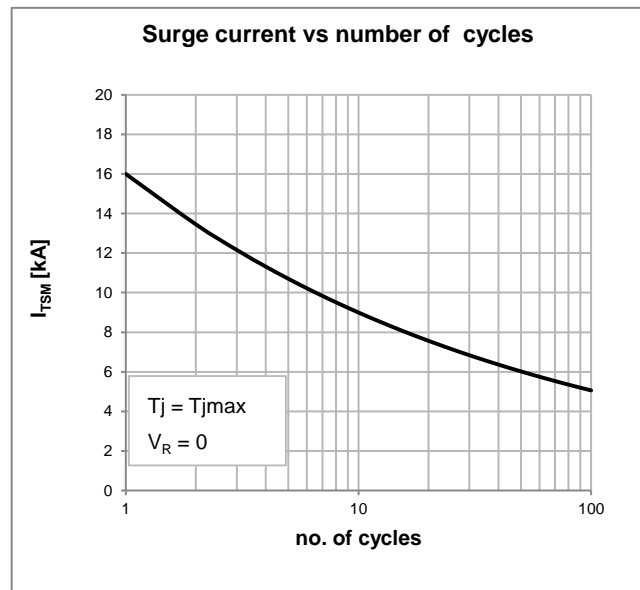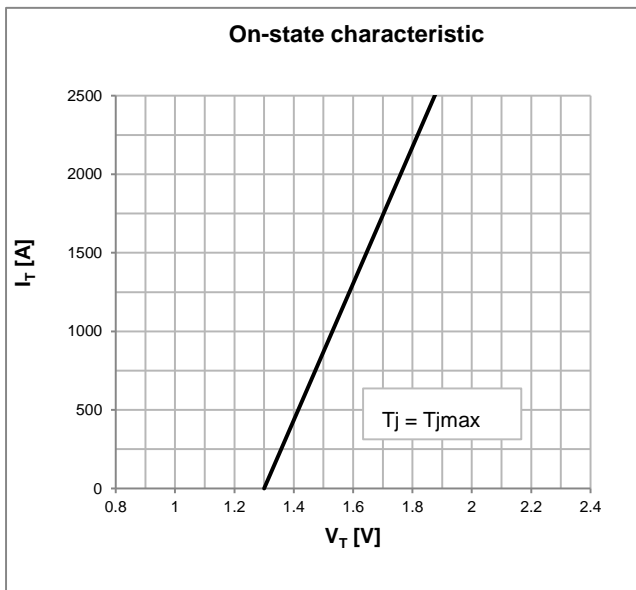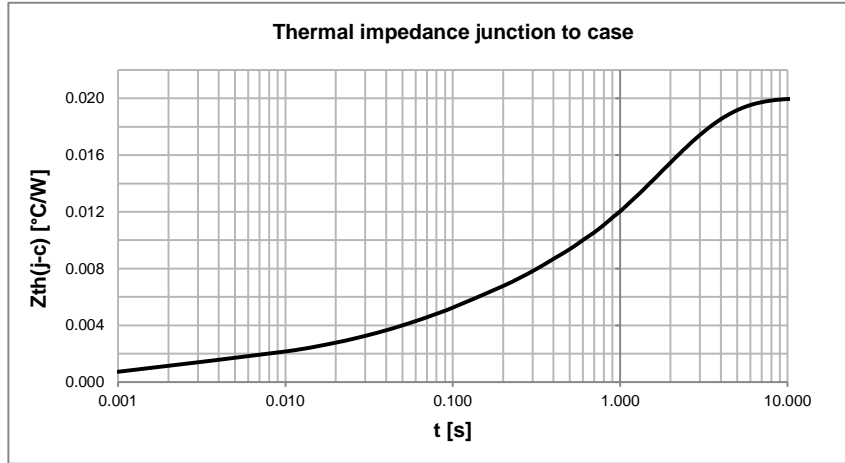

OUTLINE AND DIMENSIONS

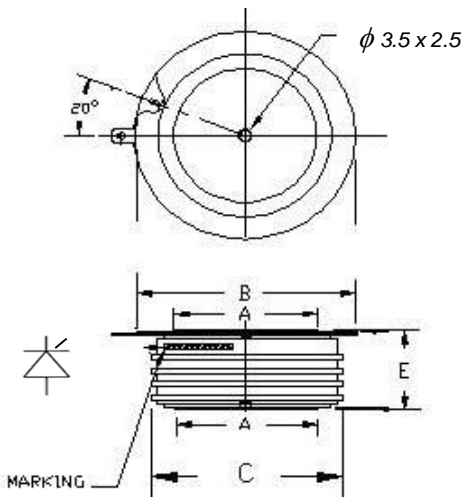

| | A | B | C | E |
|----|----|----|----|--------|
| mm | 47 | 75 | 66 | 26 ± 1 |

- All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink surfaces with flatness < 0.03 mm and roughness < 2µm