

PST MT630

SINGLE THYRISTOR MODULE

Features:

- Electrically isolated base plate
- High surge capability
- Precious metal pressure contact

Typical applications:

- DC motor control (e.g. for machine tools)
- Field power supply for DC motors
- Temperature control (e.g. for ovens, chemical processes)

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse blocking - Off-state

Device Type	V_{RRM} (1)	V_{DRM} (1)	V_{RSM} (1)
PST MT630	2400 V	2400 V	2500 V

V_{RRM} = Repetitive peak reverse voltage

V_{DRM} = Repetitive peak off-state voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive reverse and off-state peak leakage current	I_{RRM}, I_{DRM}	70 mA (3)
Critical rate of rise of off-state voltage	dv/dt	500 V/ μ s (4)

Notes:

All ratings are specified for $T_j = 25\text{ }^\circ\text{C}$ unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range -30 to +125 $^\circ\text{C}$.

(2) 10 ms max. pulse width

(3) Maximum value for $T_j = T_{jmax}$

(4) Min. value for linear and exponential wave shape to 67% rated V_{DRM} .

Gate open. $T_j = T_{jmax}$

Conducting

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Average value of on-state current	$I_{T(AV)}$		634		A	50 Hz sine wave, 180 $^\circ$ conduction, $T_c = 85\text{ }^\circ\text{C}$
RMS value of on-state current	$I_{T(RMS)}$		995		A	50 Hz sine wave, 180 $^\circ$ conduction, $T_c = 85\text{ }^\circ\text{C}$
Surge non repetitive current	I_{TSM}		26		kA	50 Hz sine wave Half cycle
I squared t	$I^2 t$		3380		kA^2s	$V_R = 0$ $T_j = T_{jmax}$
Peak on-state voltage	V_{TM}		1.63		V	On-state current 2000 A, $T_j = T_{jmax}$
Threshold voltage	$V_{T(TO)}$		1.05		V	$T_j = T_{jmax}$
On-state slope resistance	r_T		0.290		m Ω	$T_j = T_{jmax}$
Holding current	I_H			350	mA	$T_j = 25\text{ }^\circ\text{C}$
Latching current	I_L			700	mA	$T_j = 25\text{ }^\circ\text{C}$
Critical rate of rise of on-state current	di/dt		200		A/ μ s	$I_G = 5 I_{GT}$, $t_r = 1\text{ }\mu\text{s}$, $T_j = T_{jmax}$
RMS isolation voltage	V_{INS}		4500		V	AC 50 Hz, 1 s

PST MT630




SINGLE THYRISTOR MODULE

Triggering

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Gate current	I_{GT}		350		mA	$V_D = 6\text{ V}; R_L = 6\ \Omega; T_j = 25\text{ }^\circ\text{C}$
Gate voltage	V_{GT}		3.5		V	$V_D = 6\text{ V}; R_L = 6\ \Omega; T_j = 25\text{ }^\circ\text{C}$

Thermal and mechanical characteristics and ratings


Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Operating temperature	T_j	-30	125		$^\circ\text{C}$	
Storage temperature	T_{stg}	-30	125		$^\circ\text{C}$	
Thermal resistance junction to case	$R_{th(j-c)}$		0.042		$^\circ\text{C/W}$	SIN 180° conduction mounting surfaces smooth, flat and greased
Thermal resistance case to sink	$R_{th(c-s)}$		0.020		$^\circ\text{C/W}$	
Mounting torque case-heatsink	T	4	6		N·m	
Mounting torque busbar-terminals	T	12	18		N·m	
Weight	W			2800	g	

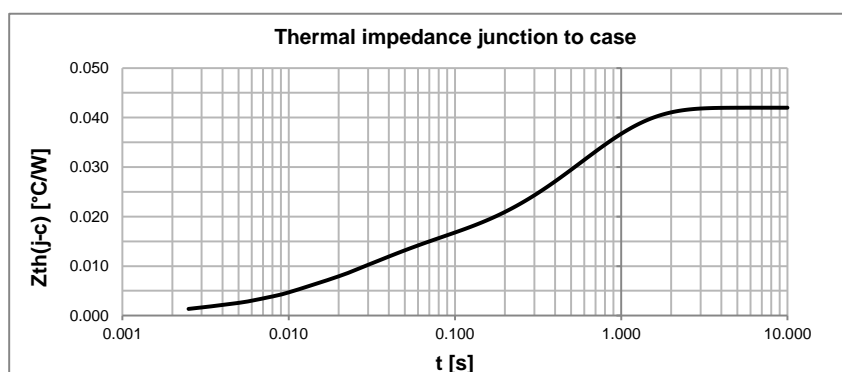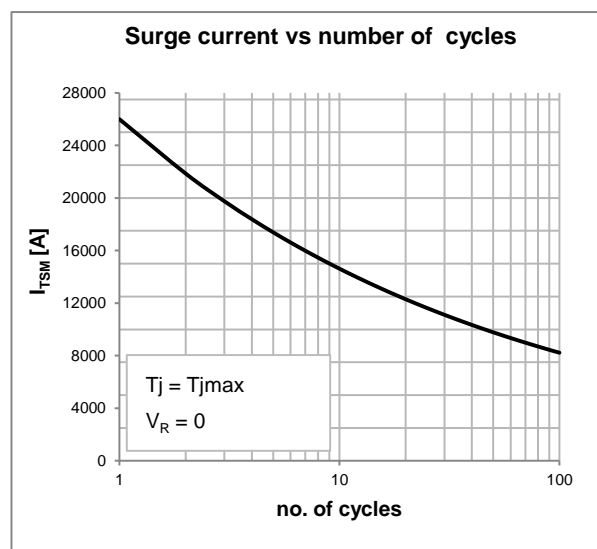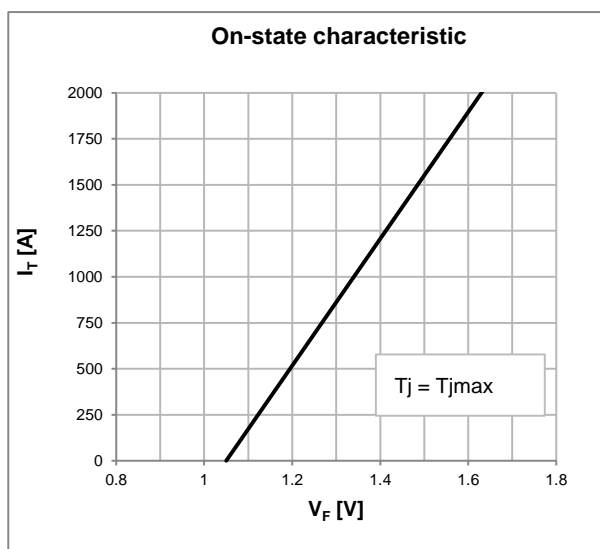

PST MT630

SINGLE THYRISTOR MODULE

OUTLINE AND DIMENSIONS

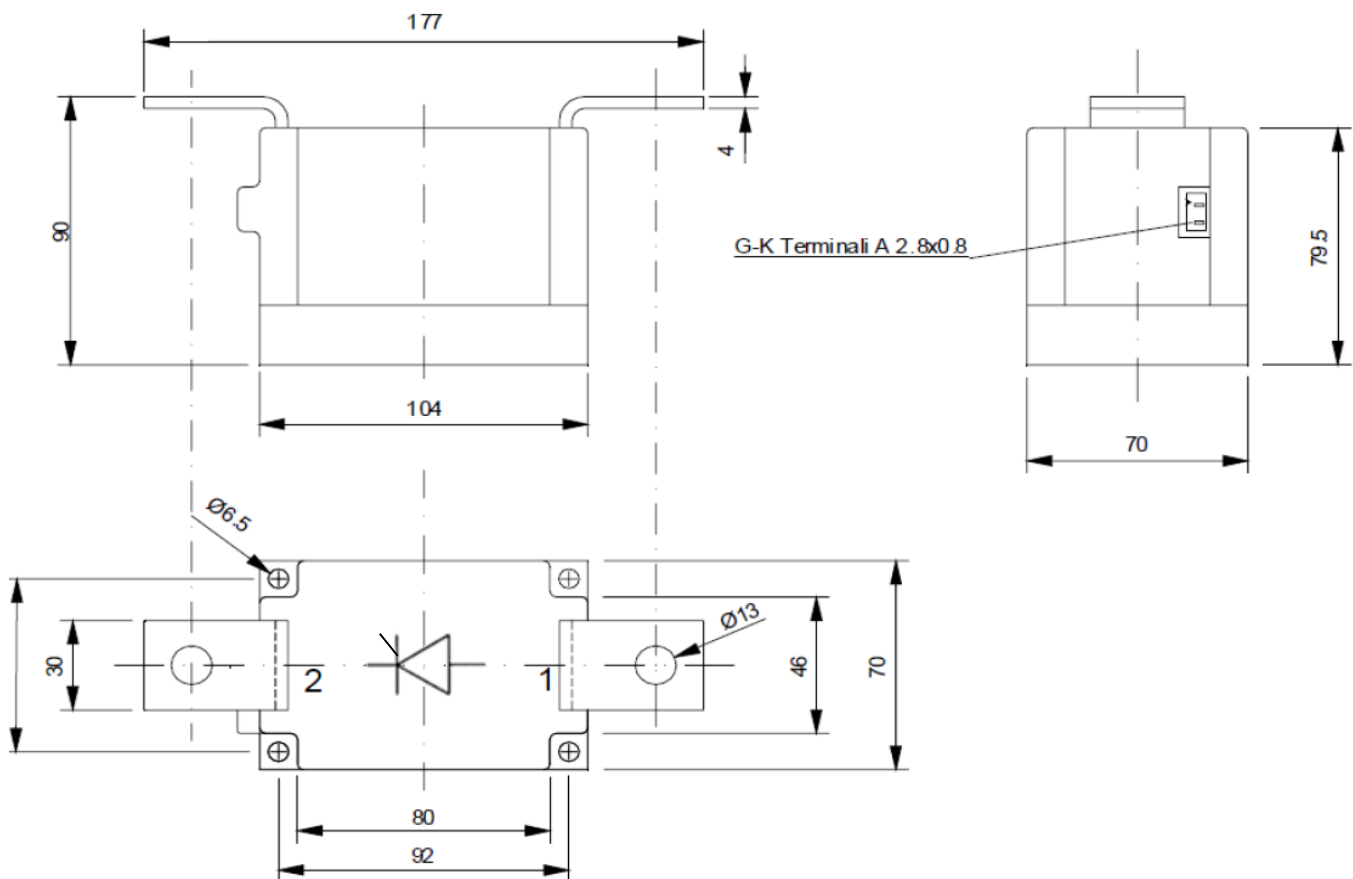

(all dimensions in mm)