



# Technical Data

## PST MFC260

### THYRISTOR - DIODE MODULE

#### Features:

- Industrial standard package
- Electrically isolated base plate
- Hard soldered joints for high reliability

#### Typical applications:

- AC motor soft starters
- DC motor control (e.g. for machine tools)
- Temperature control

## ELECTRICAL CHARACTERISTICS AND RATINGS

#### Reverse blocking - Off-state

Device Type	$V_{RRM}$ (1)	$V_{DRM}$ (1)	$V_{RSM}$ (1)
PST MFC260	1600 V	1600 V	1700 V

$V_{RRM}$  = Repetitive peak reverse voltage

$V_{DRM}$  = Repetitive peak off state voltage

$V_{RSM}$  = Non repetitive peak reverse voltage (2)

Repetitive reverse and off-state peak leakage current	$I_{RRM}, I_{DRM}$	20 mA (3)
Critical rate of rise of off-state voltage	$dv/dt$	1000 V/ $\mu$ s (4)

#### Notes:

All ratings are specified for  $T_j = 25^\circ\text{C}$  unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range -40 to +140 °C.

(2) 10 ms max. pulse width

(3) Maximum value for  $T_j = T_{jmax}$

(4) Min. value for linear and exponential wave shape to 80% rated  $V_{DRM}$ .

Gate open.  $T_j = T_{jmax}$

#### Conducting

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Average value of on-state current	$I_{T(AV)}$		260		A	50 Hz sine wave, 180° conduction, $T_c = 85^\circ\text{C}$
RMS value of on-state current	$I_{T(RMS)}$		408		A	50 Hz sine wave, 180° conduction, $T_c = 85^\circ\text{C}$
Surge non repetitive current	$I_{TSM}$		7.5		kA	50 Hz sine wave Half cycle $V_R = 0$ $T_j = T_{jmax}$
$I^2 t$	$I^2 t$		281		kA²s	
Peak on-state voltage	$V_{TM}$		1.06		V	On-state current 200 A, $T_j = T_{jmax}$
Threshold voltage	$V_{T(TO)}$		0.81		V	$T_j = T_{jmax}$
On-state slope resistance	$r_T$		1.23		mΩ	$T_j = T_{jmax}$
Holding current	$I_H$			150	mA	$T_j = 25^\circ\text{C}$
Latching current	$I_L$			200	mA	$T_j = 25^\circ\text{C}$
Critical rate of rise of on-state current	$di/dt$		100		A/ $\mu$ s	$I_G = 5 I_{GT}$ , $t_r = 1 \mu\text{s}$ , $T_j = T_{jmax}$
RMS isolation voltage	$V_{INS}$		4000/4800		V	AC 50 Hz, 60 s / 1 s

# PST MFC260




## THYRISTOR - DIODE MODULE

### Triggering

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Gate current	$I_{GT}$		150		mA	$V_D = 6 \text{ V}; R_L = 3 \Omega; T_j = 25^\circ\text{C}$
Gate voltage	$V_{GT}$		2		V	$V_D = 6 \text{ V}; R_L = 3 \Omega; T_j = 25^\circ\text{C}$

### Thermal and mechanical characteristics and ratings



Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Operating temperature	$T_j$	-40	140		°C	
Storage temperature	$T_{stg}$	-40	125		°C	
Thermal resistance junction to case (per junction)	$R_{th(j-c)}$		0.130	°C/W	SIN 180° conduction mounting surfaces smooth, flat and greased	
Thermal resistance case to sink (per junction)	$R_{th(c-s)}$		0.080			
Mounting torque case-heatsink	$T$	2.3	2.8		N·m	
Mounting torque busbar-terminals	$T$	4.5	5.5		N·m	
Weight	$W$			150	g	

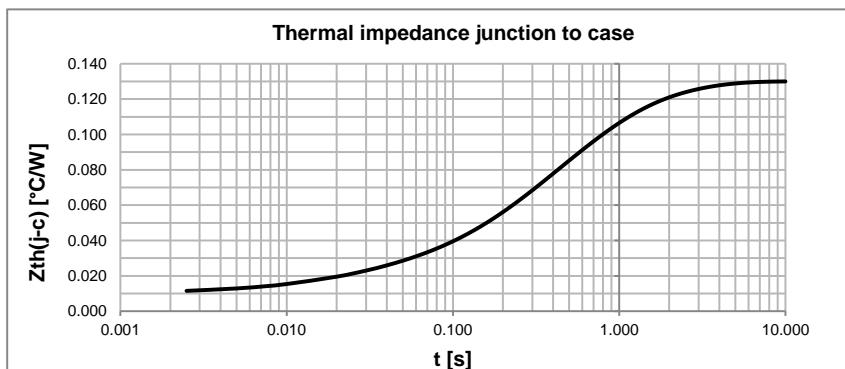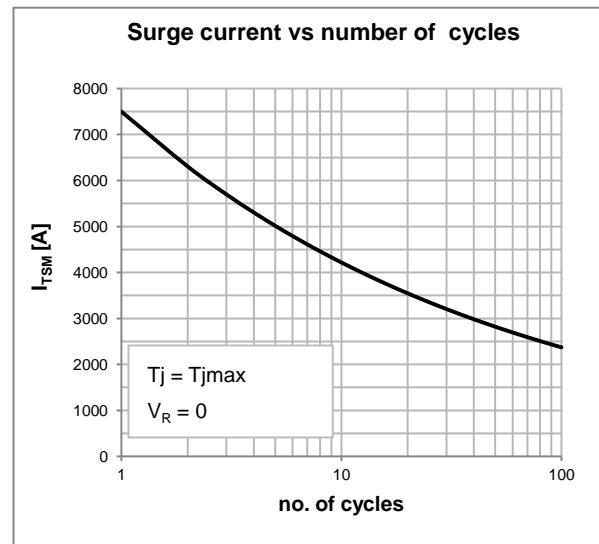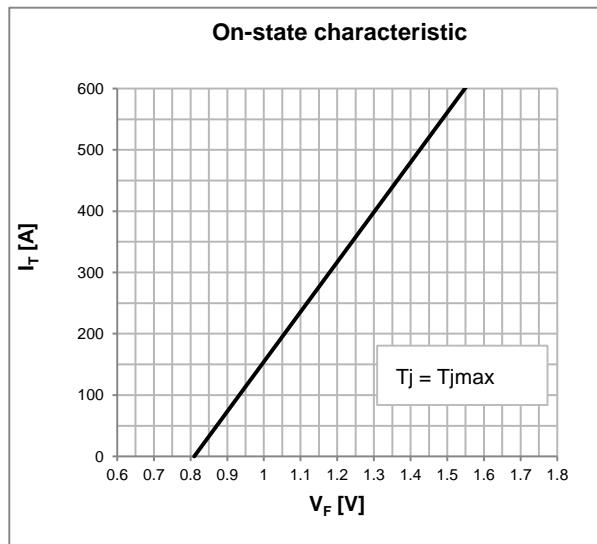

PST MFC260

## **THYRISTOR - DIODE MODULE**

## **OUTLINE AND DIMENSIONS**

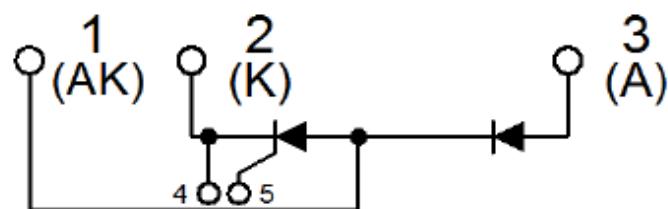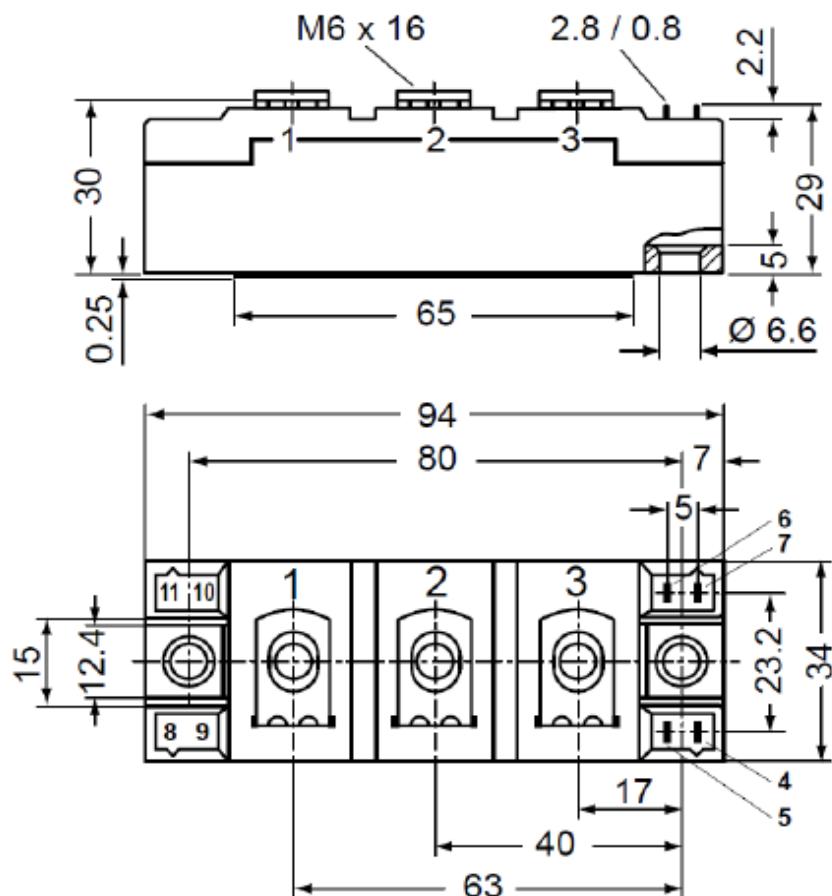

(all dimensions in mm)