

PST MDC200

RECTIFIER DIODE MODULE

Features:

- Heat transfer through aluminum nitride ceramic isolated metal baseplate
- Hard Soldered Joints For High Reliability
- UL Recognized

Typical applications:

- Rectifier for drives applications
- Rectifiers for UBS
- Battery chargers

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse blocking

Device Type	V_{RRM} (1)	V_{RSM} (1)
PST MDC200	1600 V	1700 V

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Notes:

All ratings are specified for $T_j = 25^\circ\text{C}$ unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range -40 to $+150^\circ\text{C}$.

(2) 10 ms max. pulse width

(3) Maximum value for $T_j = 150^\circ\text{C}$.

Repetitive peak reverse leakage current	I_{RRM}	20 mA (3)
---	-----------	-----------

Conducting




Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Average value of forward current	$I_{F(AV)}$		225		A	50 Hz sinewave, 180° conduction, $T_c = 100^\circ\text{C}$
RMS value of forward current	$I_{F(RMS)}$		350		A	50 Hz sinewave, 180° conduction, $T_c = 100^\circ\text{C}$
Peak one cycle surge (non repetitive) current	I_{FSM}		9.8		kA	50 Hz sinewave, 180° conduction, $T_j = T_{jmax}$, $V_R = 0$
I square t	$I^2 t$		480		kA^2s	$T_j = T_{jmax}$
Peak forward voltage	V_{FM}		1.35		V	Forward current 600 A, $T_j = T_{jmax}$
Threshold voltage	$V_{F(TO)}$		0.8		V	$T_j = T_{jmax}$
Forward slope resistance	r_F		0.6		$\text{m}\Omega$	$T_j = T_{jmax}$
RMS isolation voltage	V_{INS}		3000		V	AC 50 Hz, 60 s

PST MDC200

RECTIFIER DIODE MODULE

Thermal and mechanical characteristics and ratings


Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Operating temperature	T_j	-40	150		°C	
Storage temperature	T_{stg}	-40	150		°C	
Thermal resistance junction to case (per module)	$R_{th(j-c)}$		0.065		°C/W	SIN 180° conduction mounting surfaces smooth, flat and greased
Thermal resistance case to sink (per module)	$R_{th(c-s)}$		0.020		°C/W	
Mounting torque case-heatsink	T	2.3	2.7		N·m	
Mounting torque busbar-terminals	T	4.5	5.5		N·m	
Weight	W			150	g	

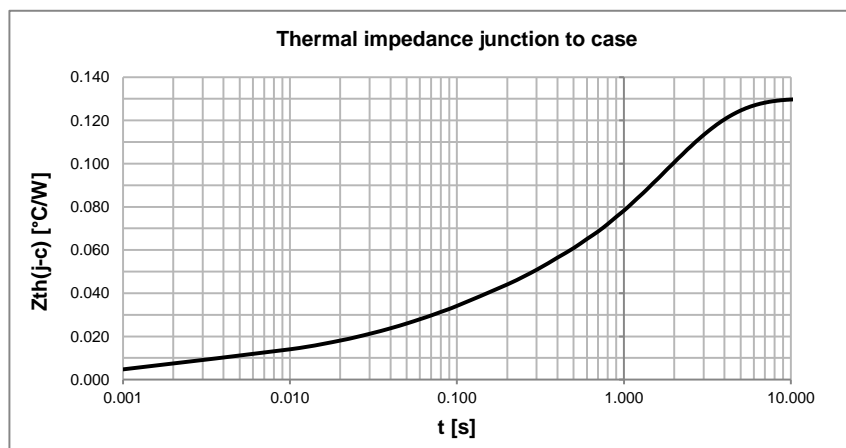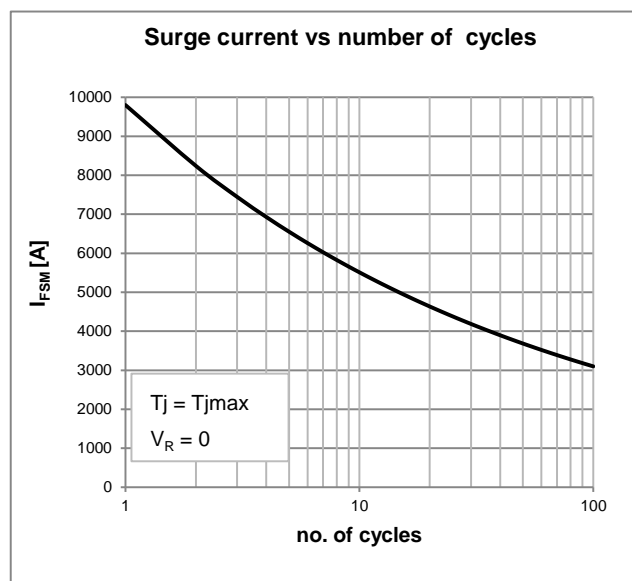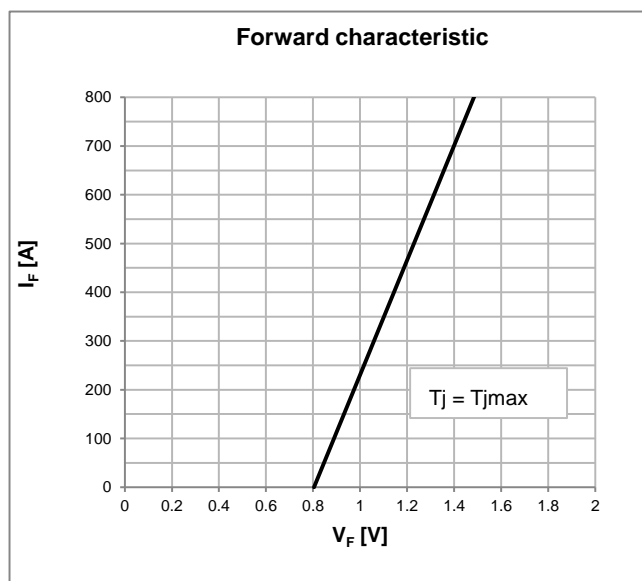

PST MDC200

RECTIFIER DIODE MODULE

OUTLINE AND DIMENSIONS

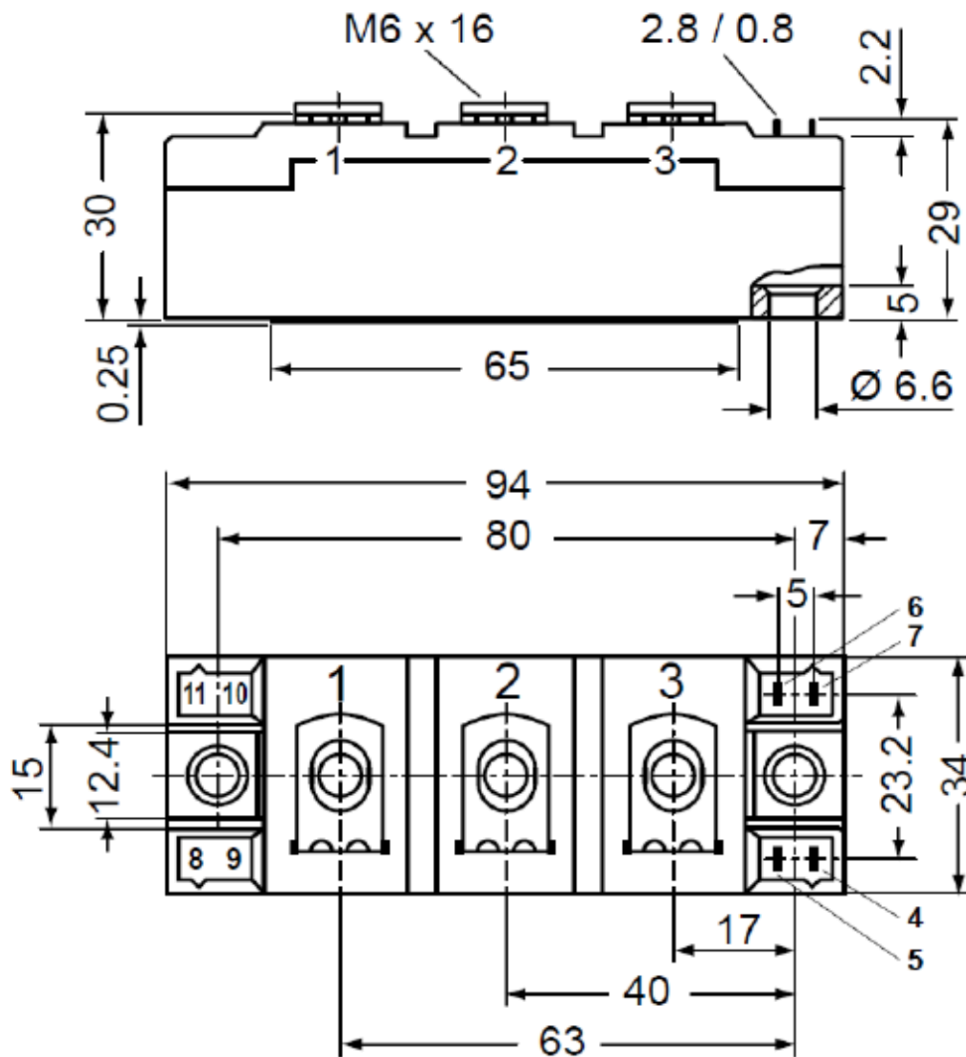

dimensions in mm

